

TFVM220~230 시리즈


푸트 밸브




TFVM230

표시 기호


2포트



3포트



주문형식



① 푸트 밸브

② 포트수

20 : 2포트

30 : 3포트 (잔압배기홀 포함)

③ 나사종류

무기호 : Rc(PT)

N : NPT

G : G(PF)



④ 관접속 구경

02 : 1/4

표준사양

사용유체	압축공기
사용압력범위	0~10bar (0~1MPa)
주위온도 및 사용유체온도	-5 ~60°C (동결없어야 함)
유효단면적 (Cv)	19mm ² (1.0)
급유	불필요(단, 급유시 터빈유 1종 (ISO VG32))
관접속구경	1/4

외형치수도(mm)

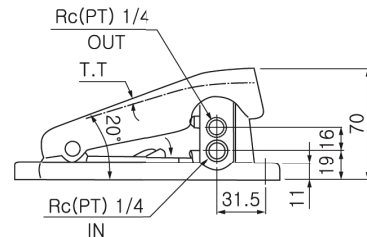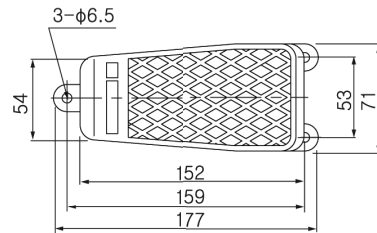

TV2

TV2WFI

TV2WC

FSW

DR100
DR200

RS1000
RS2000

RS4000
RS4R

SI UNIT

RDV100
RDV300
RDV400

DVC1000

DV1000
DV3000
DV4000

DVUM1000
DVUM3000
DVUM4000

DVP1000
DVP3000
DVP4000

RDS300
RDS3000
RDS5000

RDSN3000

DS2000
DS6000

DX1
DX2

DX1R
DX2R

TVH

TFVM

DP300
DP3000
DP5000

DM

DT220

DQE

DCV

TX350


TFVM250 시리즈

파일럿형 푸트 밸브




TFVM250

표시 기호



주문형식



① 푸트 밸브

② 포트수
50 : 5포트

③ 나사종류

무기호 : Rc(PT)
N : NPT
G : G(PF)

④ 관접속 구경

02 : 1/4
03 : 3/8

표준사양

형식	TFVM250-02	TFVM250-03
사용유체	압축공기	
사용압력범위	0~10bar (0~1MPa)	
주위온도 및 사용유체온도	-5 ~60°C (동결없어야 함)	
유효단면적 (Cv)	19mm ² (1.0)	45mm ² (2.4)
급유	불필요(단, 급유시 터빈유 1종 (ISO VG32))	
관접속구경	1/4	3/8

외형치수도(mm)

